


T-100 Auburn Enclosed Style T-100 Ball Thrust Bearing



The T-100 Series is recommended for use in exposed locations where protection from dust, dirt, water or other foreign matter is required. It is self-contained; the two races and the balls are held together as a unit by the outside sleeve made of steel or brass.

Please note: Part numbers with a grey background indicate items normally stocked in Macedon, NY.

Bearing Number	DIMENSIONS IN INCHES									THRUST LOAD CAPACITY IN LBS. AT VARIOUS SPEEDS				
	A Bore	A Tolerance		A' Bore	A' Tolerance -.000	B Outside Diameter	B Tolerance + or -	H Height (H Tolerance) + or - .005	Balls No.-Size	Bearing Weight in lbs.	25 RPM	100 RPM	500 RPM	1500 RPM
00	$5/16$	+0.001	+0.003	$21/64$	+0.015	$11/16$.015	$5/16$	12- $1/8$.03	600	395	245	175
0	$3/8$	+0.001	+0.003	$25/64$	+0.015	$3/4$.015	$5/16$	13- $1/8$.04	630	415	260	185
$3/8$	$3/8$	+0.001	+0.003	$25/64$	+0.015	1- $3/16$.015	$1/2$	12- $7/32$.11	1730	1140	700	505
$1/2$	$1/2$	+0.001	+0.003	$17/32$	+0.015	1- $3/16$.015	$3/8$	17- $5/32$.08	1155	760	470	335
1	$1/2$	+0.001	+0.003	$17/32$	+0.015	1- $3/16$.015	$5/8$	10- $1/4$.13	1930	1275	785	565
2	$5/8$	+0.001	+0.003	$21/32$	+0.015	1- $3/8$.015	$5/8$	12- $1/4$.16	2225	1465	905	645
3	$3/4$	+0.001	+0.003	$25/32$	+0.015	1- $1/2$.015	$11/16$	14- $1/4$.19	2480	1635	1005	725
4	$7/8$	+0.001	+0.003	$29/32$	+0.015	1- $13/16$.015	$11/16$	13- $5/16$.30	3750	2350	1450	1040
5	$15/16$	+0.001	+0.003	$31/32$	+0.015	2	.015	$13/16$	12- $3/8$.44	4700	3095	1905	1370
6	$15/16$	+0.001	+0.003	$31/32$	+0.015	2	.015	$11/16$	15- $5/16$.36	3940	2595	1600	1150
7	1	+0.001	+0.003	1- $1/32$	+0.015	2	.015	$13/16$	12- $3/8$.41	4700	3095	1905	1370
8	1	+0.001	+0.003	1- $1/32$	+0.015	2	.015	$11/16$	15- $5/16$.34	3940	2595	1600	1150
9	1- $1/16$	+0.001	+0.003	1- $3/32$	+0.015	2	.015	$11/16$	15- $5/16$.33	3940	2595	1600	1150
10	1- $1/16$	+0.001	+0.003	1- $3/32$	+0.015	2- $3/16$.015	$13/16$	13- $3/8$.53	4985	3285	2025	1455
11	1- $1/8$	+0.001	+0.003	1- $5/32$	+0.015	2- $3/16$.015	$15/16$	13- $3/8$.63	4985	3285	2025	1455
12	1- $3/16$	+0.001	+0.003	1- $7/32$	+0.015	2- $3/16$.015	$11/16$	16- $5/16$.41	4100	2700	1665	1195
13	1- $1/4$	+0.001	+0.003	1- $9/32$	+0.015	2- $3/16$.015	$11/16$	17- $5/16$.38	4250	2800	1725	1240
14	1- $3/16$	+0.001	+0.003	1- $7/32$	+0.015	2- $13/32$.015	$15/16$	15- $3/8$.75	5505	3625	2235	1605
15	1- $1/4$	+0.001	+0.003	1- $9/32$	+0.015	2- $13/32$.015	$15/16$	15- $3/8$.70	5505	3625	2235	1605
16	1- $5/16$	+0.001	+0.003	1- $11/32$	+0.015	2- $13/32$.015	$15/16$	15- $3/8$.69	5505	3625	2235	1605
17	1- $5/16$	+0.001	+0.003	1- $11/32$	+0.015	2- $13/32$.015	$11/16$	18- $5/16$.50	4395	2895	1785	1280
17A	1- $3/8$	+0.001	+0.003	1- $13/32$	+0.015	2- $13/32$.015	$11/16$	19- $5/16$.44	4525	2975	1835	1315
18	1- $7/16$	+0.001	+0.003	1- $15/32$	+0.015	2- $13/32$.015	$11/16$	19- $5/16$.47	4525	2975	1835	1315
19	1- $7/16$	+0.001	+0.003	1- $15/32$	+0.015	2- $1/2$.015	$15/16$	16- $3/8$.69	5730	3775	2325	1670
19A	1- $3/8$	+0.001	+0.003	1- $13/32$	+0.015	2- $1/2$.015	$15/16$	16- $3/8$.75	5730	3775	2325	1670
20	1- $7/16$	+0.001	+0.003	1- $15/32$	+0.015	2- $19/32$.015	$15/16$	17- $3/8$.77	5945	3915	2410	1735
21	1- $1/2$	+0.001	+0.003	1- $17/32$	+0.015	2- $19/32$.015	$11/16$	20- $5/16$.52	4630	3050	1875	1350
22	1- $1/2$	+0.001	+0.003	1- $17/32$	+0.015	2- $19/32$.015	$15/16$	17- $3/8$.72	5945	3915	2410	1735
23	1- $5/8$	+0.001	+0.003	1- $21/32$	+0.015	2- $19/32$.015	$11/16$	21- $5/16$.51	4750	3130	1930	1385
24	1- $11/16$	+0.001	+0.003	1- $23/32$	+0.015	2- $19/32$.015	$11/16$	21- $5/16$.47	4750	3130	1930	1385

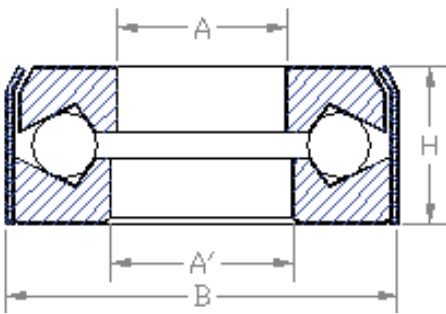

T-100 Mounting Instructions

The T-100 Series is generally installed so that race A is centered by the shaft and rotates with it. The race with the sleeve attached to it, clearance bore A', is seated against a fixed part of the machine and is stationary. If installed in a recess, a clearance of one-eighth inch or more should be left around the outside diameter B so if the shaft wears in its journal bearings, the thrust bearing will be free to follow without cramping or wedging the balls.

Bearing Number	DIMENSIONS IN INCHES								THRUST LOAD CAPACITY IN LBS. AT VARIOUS SPEEDS					
	A Bore	A Tolerance		A' Bore	A' Tolerance -.000	B Outside Diameter	B Tolerance + or -	H Height (H Tolerance) + or -.005	Balls No.-Size	Bearing Weight in lbs.	25 RPM	100 RPM	500 RPM	1500 RPM
25	1- ¹³ / ₁₆	+0.001	+0.003	1- ²⁷ / ₃₂	+0.015	2- ³ / ₄	.015	¹¹ / ₁₆	22 - ⁵ / ₁₆	.53	4820	3175	1955	1405
26	1- ¹¹ / ₁₆	+0.001	+0.003	1- ²³ / ₃₂	+0.015	2- ³ / ₄	.015	¹³ / ₁₆	18 - ³ / ₈	.69	6140	4045	2490	1790
27	1- ⁷ / ₈	+0.001	+0.003	1- ²⁹ / ₃₂	+0.015	2- ³ / ₄	.015	¹³ / ₁₆	23 - ⁵ / ₁₆	.56	4910	3235	1995	1430
28	1 ⁹ / ₁₆	+0.001	+0.003	1- ¹⁹ / ₃₂	+0.015	2- ³ / ₄	.015	1	15- ⁷ / ₁₆	.94	7280	4795	2955	2120
29	1 ⁵ / ₈	+0.001	+0.003	1- ²¹ / ₃₂	+0.015	3	.015	1- ³ / ₁₆	14- ¹ / ₂	1.31	8830	5815	3580	2575
30	1- ¹⁵ / ₁₆	+0.001	+0.003	1- ³¹ / ₃₂	+0.015	3	.015	¹³ / ₁₆	20- ³ / ₈	.75	6485	4270	2630	1890
31	2	+0.001	+0.003	2- ¹ / ₃₂	+0.015	3	.015	¹³ / ₁₆	20- ³ / ₈	.72	6485	4270	2630	1890
32	1- ¹¹ / ₁₆	+0.001	+0.003	1- ²³ / ₃₂	+0.015	3- ³ / ₁₆	.015	1- ¹ / ₈	15- ¹ / ₂	1.44	9255	6095	3755	2825
33	2- ³ / ₁₆	+0.001	+0.003	2- ⁷ / ₃₂	+0.015	3- ³ / ₁₆	.015	¹³ / ₁₆	26- ⁵ / ₁₆	.78	5070	3340	2060	1480
34	1- ³ / ₄	+0.001	+0.003	1- ²⁵ / ₃₂	+0.015	3- ³ / ₁₆	.015	1- ¹ / ₈	15- ¹ / ₂	1.34	9255	6095	3755	2825
35	2- ¹ / ₄	+0.001	+0.003	2- ⁹ / ₃₂	+0.015	3- ¹ / ₄	.015	¹³ / ₁₆	22- ³ / ₈	.80	6755	4450	2740	1970
36	2- ⁵ / ₁₆	+0.001	+0.003	2- ¹¹ / ₃₂	+0.015	3- ¹ / ₄	.015	¹³ / ₁₆	28- ⁵ / ₁₆	.78	5130	3380	2085	1495
37	1- ¹⁵ / ₁₆	+0.001	+0.003	1- ³¹ / ₃₂	+0.015	3- ¹ / ₄	.015	1- ³ / ₁₆	16- ¹ / ₂	1.44	9640	6350	3910	2810
38	2	+0.001	+0.003	2- ¹ / ₃₂	+0.015	3- ¹ / ₄	.015	1- ³ / ₁₆	16- ¹ / ₂	1.34	9640	6350	3910	2810
39	2- ³ / ₁₆	+0.001	+0.003	2- ⁷ / ₃₂	+0.015	3- ⁷ / ₈	.015	1- ¹ / ₄	19- ¹ / ₂	2.25	10635	7005	4315	3100
40	2- ¹ / ₄	+0.001	+0.003	2- ⁹ / ₃₂	+0.015	3- ⁷ / ₈	.015	1- ¹ / ₄	19- ¹ / ₂	2.13	10635	7005	4315	3100
41	2- ⁷ / ₁₆	+0.001	+0.003	2- ¹⁵ / ₃₂	+0.015	4	.015	1- ¹ / ₄	20- ¹ / ₂	2.19	10900	7180	4425	3175
41A	1- ¹⁵ / ₁₆	+0.001	+0.003	1- ³¹ / ₃₂	+0.015	4	.015	1- ⁵ / ₈	13- ¹¹ / ₁₆	3.60	14690	9675	5960	4280
42	2- ¹ / ₂	+0.001	+0.003	2- ¹⁷ / ₃₂	+0.015	4	.015	1- ¹ / ₄	20- ¹ / ₂	2.13	10900	7180	4425	3175
43	2- ¹⁵ / ₁₆	+0.001	+0.003	2- ³¹ / ₃₂	+0.015	4- ⁵ / ₈	.015	1- ¹ / ₂	19- ⁵ / ₈	3.44	15780	10395	6405	4600
43A	2- ³ / ₄	+0.001	+0.003	2- ²⁵ / ₃₂	+0.015	4- ⁵ / ₈	.015	1- ¹ / ₂	19- ⁵ / ₈	3.50	15780	10395	6405	4600
44	3	+0.001	+0.003	3- ¹ / ₃₂	+0.015	4- ⁵ / ₈	.015	1- ¹ / ₂	19- ⁵ / ₈	3.38	15780	10395	6405	4600
45	3	+0.001	+0.003	3- ¹ / ₃₂	+0.015	4- ⁵ / ₈	.015	1	27- ⁷ / ₁₆	2.26	9460	6230	3840	2755
46	2- ⁷ / ₁₆	+0.001	+0.003	2- ¹⁵ / ₃₂	+0.015	4- ⁵ / ₈	.015	1- ⁵ / ₈	16- ¹¹ / ₁₆	4.60	16875	11115	6845	4920
47	3- ⁷ / ₁₆	+0.002	+0.004	3- ¹⁵ / ₃₂	+0.015	5	.031	1	30- ⁷ / ₁₆	2.48	9490	6250	3850	---
48	2- ³ / ₁₆	+0.001	+0.003	2- ⁷ / ₃₂	+0.015	5	.031	2- ¹ / ₄	11 - 1	8.47	24490	16130	9935	---
49	4- ¹ / ₂	+0.003	+0.007	4- ⁹ / ₁₆	+0.015	6- ¹ / ₄	.031	1- ³ / ₈	30- ⁹ / ₁₆	4.47	14860	9790	6030	---
50	3- ⁷ / ₁₆	+0.002	+0.004	3- ¹⁵ / ₃₂	+0.015	6- ¹ / ₄	.031	2	18- ⁷ / ₈	10.18	27300	17985	11080	---
51	3	+0.001	+0.003	3- ¹ / ₃₂	+0.015	6- ¹ / ₄	.031	3	11-1- ¹ / ₄	18.30	35110	23135	14245	---
52	4	+0.002	+0.004	4- ¹ / ₃₂	+0.015	6- ⁷ / ₈	.031	2	20- ⁷ / ₈	11.76	28840	18990	11700	---
53	4- ⁷ / ₁₆	+0.003	+0.007	4- ¹ / ₂	+0.015	6- ⁷ / ₈	.031	2- ¹ / ₄	20- ⁷ / ₈	12.83	28840	18990	11700	---
54	5	+0.003	+0.007	5- ¹ / ₁₆	+0.015	7	.031	1- ¹ / ₄	37- ¹ / ₂	5.03	11135	7335	4520	---
56	6- ¹ / ₂	+0.010	+0.015	6- ⁹ / ₁₆	+0.015	8- ³ / ₄	.031	1- ¹ / ₂	37- ⁵ / ₈	10.12	16540	10895	6710	---